

# PRV

PATENT- OCH REGISTRERINGSVERKET  
Patentavdelningen

## Intyg Certificate

Härmed intygas att bifogade kopior överensstämmer med de handlingar som ursprungligen ingivits till Patent- och registreringsverket i nedannämnda ansökan.

*This is to certify that the annexed is a true copy of the documents as originally filed with the Patent- and Registration Office in connection with the following patent application.*

(71) Sökande Volvo Technology Corp, Göteborg SE  
Applicant (s) Ford Global Technologies Inc, Dearborn MI US

(21) Patentansökningsnummer 0200452-1  
Patent application number

(86) Ingivningsdatum 2002-02-15  
Date of filing

Stockholm, 2004-08-25

För Patent- och registreringsverket  
For the Patent- and Registration Office



Hjordis Segerlund

Avgift  
Fee 170:-

C13846, IF  
2002-02-14

Ink. t. Patent- och register

2002-02-15

Huvudföreläsning

**TITLE:**

5 A device for treatment of a gas flow.

**TECHNICAL FIELD:**

The invention generally relates to a device for treatment of a gas flow. In particular, the invention relates to a device for catalytic purification of exhaust gases emanating from  
10 internal combustion engines.

**BACKGROUND ART:**

Exhaust gases emanating from e.g. internal combustion engines or industrial processes generally contain potentially hazardous compounds such as hydrocarbons (HC), carbon  
15 monoxide (CO), oxides of nitrogen (NO<sub>x</sub>) and particulates. Such compounds need to be converted to harmless, or at least less hazardous, compounds in order to reduce the amount of hazardous compounds released to the environment. Commonly, the exhaust gases undergo some form of catalytic treatment and/or filtering process.

20 In most of the conversions of interest in this context, the temperature is an important feature. Many important conversion reactions require a rather high temperature. The use of catalysts, e.g. metals or metal oxides from the platinum group, makes it possible to convert the hazardous compounds with a satisfactory reaction rate at a much lower temperature than if catalysts are not used. However, a high reaction rate can only be achieved if the temperature  
25 is sufficient, i.e. above the so called light-off temperature at which the catalyzed reaction rate becomes significant. The light-off temperature is usually in the range 200-400°C. If the light-off temperature has not yet been reached, or if the temperature falls below light-off so that the conversion stops, almost no hazardous compounds will be converted. These are well-known problems associated with e.g. cold start of an engine (with a similarly cold catalyzer) and with  
30 "cold" exhaust gases, such as those emanating from a diesel engine.

The temperature is further important in regeneration of purification devices, e.g. the removal of trapped particles by combustion or the removal of impurities such as sulphur oxides (SO<sub>x</sub>) from a catalytic device. Such processes can be cyclic and involve a temperature increase to

Page 15

Hövelmann, Rüdiger

around 600°C for a certain time period. As the purification devices normally degrade if they are exposed to too high temperatures there is an upper temperature limit that should not be exceeded. Thus, it is not only the temperature that is an important feature, but also the control of the temperature; both at normal operation to achieve a good conversion and during  
5 regeneration processes.

A conventional physical structure of a catalytic converter, as for instance disclosed in US 3885977, is the ceramic honeycomb monolith with parallel, open channels. The catalytic material is deposited onto the walls of the honeycomb channels. As the gas flows from one  
10 end to the other, the catalytic conversion takes place. This type of structure generally works well provided that the temperature of the device is above the light-off temperature. However, at cold-start situations the hazardous compounds flow through the channels without conversion.

15 In order to reduce the amounts of hazardous compounds that are released during cold start it is a well known technique to use adsorption traps, i.e. to deposit a material, besides the catalysts, that adsorbs and retains cold hydrocarbons and/or nitrogene oxides until the catalyst reaches the light-off temperature. As an example, this is disclosed in WO95/18292. A problem with this technique when applied to the conventional physical structure described above is that the  
20 desorption temperature for most compounds generally is lower than the temperature required for conversion. A great deal of the hazardous compounds will thus still flow through the channels without conversion.

Another approach to solve the problem with cold converters is to introduce electric heating, as  
25 disclosed in for instance WO92/14912. It is however difficult to make the heating fast enough and the costs for components and energy are high. This kind of electric heating may also be a safety risk (electricity, fire).

Another important feature is the pressure drop over the purification device as energy is  
30 needed to overcome the gas flow resistance of the device. For instance, an increased pressure drop over a purification device for a vehicle engine could result in an increased fuel consumption.

2002-02-15

Huvudturneringen

An interesting technique that has been proposed more lately is the combination of a catalytic purification device and a heat exchanger permitting heat exchange between the incoming gas and the outgoing gas. This technique makes it possible to utilize the heat in the exhaust gas in a more efficient way which is an advantage under most, if not all, operation conditions. EP 5 1016777 discloses a construction that consists of a corrugated metal strip that is folded onto itself into a bundle that forms gas flow passages between the foldings. However, the shape of the corrugation of the metal strip forms a number of small passages within each larger passage between the foldings, and as the incoming gas flow enters the larger passages from their side, most of the gas will flow in the small passages that are located closest to the side 10 from which the gas was fed. In other words, the gas enters the bundle from the side and due to difficulties to flow across the larger passages, the gas flow will not be distributed within the width of the larger passages. This leads to an overall gas flow distribution that will be non-uniform. Although this construction is of principal interest the uneven flow distribution over the catalyst may lead to an insufficient conversion, a less efficient heat exchange and to a high 15 pressure drop over the construction. Furthermore, metal constructions are generally prone to degrade in the rough environment of an exhaust gas flow.

#### DISCLOSURE OF THE INVENTION:

One object of the present invention is to provide a device for treatment of a gasflow that, 20 compared to prior art, converts the gas more efficiently and exhibits a lower pressure drop. This objective is achieved by the technical features contained in the characterizing portion of claim 1. The following claims contain advantageous embodiments, further developments and variants of the invention.

25 The invention concerns a device for treatment of a gas flow, comprising at least one body, at least one first opening for entrance of an incoming gas flow to said body and at least one second opening for the exit of an outgoing gas flow from said body, wherein said body is provided with a plurality of gas flow passages arranged to permit heat exchange between the gas flows in adjacent passages. The invention is characterized in that the device comprises at 30 least one distribution section in communication with the first opening and with the gas flow passages to distribute the incoming gas flow to the gas flow passages, and at least one gas flow passage section including said gas flow passages, which passage section primarily is adapted to permit heat exchange and to cause a conversion in the composition of the gas. An advantageous effect of this feature is that an improved gas flow distribution is achieved which

7-2-62-15

Henderson Kousen

makes it possible to both utilize the potentially available surfaces within the gas treatment device in a more efficient way, and to lower the pressure drop over the construction. A more efficient utilization of the surfaces can for instance be used to achieve a further conversion (e.g. purification) of the gas, to decrease the space required for the device by making it smaller, and to make the device cheaper by decreasing its content of catalytic material for a given level of conversion.

In an advantageous embodiment of the invention, the distribution section is adapted to distribute the incoming gas flow within the individual gas flow passages. This way the gas flow will not only be distributed among the different flow passages, but also within the individual passages which further increases the potential efficiency of the device. Preferably, the distribution section is adapted to bring about a substantially uniform gas flow within the individual gas flow passages.

**In a second advantageous embodiment of the invention, the distribution section forms a part of the body. Preferably, the distribution section is in communication with the second opening to also lead the outgoing gas flow out from the gas flow passages. Such an arrangement makes it possible to give the device a compact design. Additionally, it makes it possible to perform heat exchange also in the distribution section.**

In a third advantageous embodiment of the invention, the gas flow passages extend essentially parallel to each other, and further is the main direction of the gas flow in one gas flow passage essentially the opposite of the main direction of the gas flow in an adjacent gas flow passage. Thereby it is possible to achieve a counter-current heat exchange process for highest efficiency.

In a fourth advantageous embodiment of the invention, the body comprises a strip that is folded into a zig-zag structure, and spacer means are arranged between the foldings of the zig-zag structure in such a way that a distance is achieved between two foldings that face each other in the zig-zag structure, and the gas flow passages thereby are formed between the foldings of the zig-zag structure, and said spacer means are arranged to facilitate the distribution of the incoming gas flow in the distribution section. This arrangement allows the gas to freely flow across the gas flow passages and thus be distributed within the width of the passages. An advantageous effect of creating the gas flow passages in a folded strip by using

2002-02-15

Howard John Henson

spacer means is that it is a flexible system and it gives many possibilities to arrange the distribution section. Another advantageous effect is that it gives increased freedom in the design of the surface of the strip; the surface may for instance be essentially non-patterned to decrease the flow resistance.

5

In a fifth advantageous embodiment of the invention, the body comprises a strip that is folded into a zig-zag structure, and the surface of the strip at least partly exhibits a three-dimensional pattern, preferably corrugations, and said three-dimensional pattern is arranged to give rise to contact points and gaps between two foldings that face each other in the zig-zag structure, and the gas flow passages thereby are formed in the gaps between the foldings of the zig-zag structure, and the surface of at least one of two foldings that face each other differ from said three-dimensional pattern in the distribution section in such a way that the distribution of the incoming gas flow is facilitated. Also this arrangement allows the gas to freely flow across the gas flow passages and thus be distributed within the width of the passages. An advantageous effect of creating the gas flow passages and the distribution section in a folded strip by using different kinds of surface patterns is that the construction contains fewer parts.

In a sixth advantageous embodiment of the invention, the distribution section and the gas flow passage section form separate units that are arranged together in such a way that gas can flow from one section to the other, preferably the distribution section and the gas flow passage section are joined to each other. Thereby the sections can be produced individually which makes it possible to optimize the production process and make it more cost-effective.

In a seventh advantageous embodiment of the invention, the distribution section comprises a wall structure forming at least one first channel to which the incoming gas flow is fed, and a plurality of second channels that extend from said first channel and which second channels are open to the gas flow passages that are intended for an incoming gas flow. This enables a simple construction and a good distribution of the incoming gas flow. Preferably, said first channel is closed to the gas flow passages. Thereby the incoming gas is forced to flow via the second channels which leads to an even more uniform distribution. In a further improvement, the wall structure forms a plurality of third channels that are open to the gas flow passages that are intended for an outgoing gas flow, preferably said third channels are formed between said second channels using common walls. This is an advantageous way of leading the gas out

1992-02-15

Hans-Olof Eriksson

as heat exchange can take place also in the distribution section, and as no additional walls are needed.

In an eighth advantageous embodiment of the invention, the distribution section comprises a zig-zag shaped wall structure forming a first and a second set of channels, one set on each side of said zig-zag shaped structure, wherein said first set of channels are open to the gas flow passages that are intended for an incoming gas flow and said second set of channels are open to the gas flow passages that are intended for an outgoing gas flow, and wherein the incoming gas flow is fed to the first set of channels. Also this design enables a simple construction and a good distribution of the incoming gas flow.

In a ninth advantageous embodiment of the invention, the distribution section exhibits in at least one certain direction a substantially unchanged cross section. Thereby it is possible to produce the section by extruding means which is an cost-effective production process.

Preferably, the distribution section and the gas flow passage section are made out of a ceramic material, and the sections joined to each other by sintering means. This gives a favourable construction since a ceramic material, compared to metal, has a lower cost of material, a lower cost of production, a lower thermal expansion, a better wash-coat adhesion and has a lower thermal mass per wall volume. A construction made out of a ceramic material is also less prone to degrade in the rough environment of an exhaust gas flow.

In a tenth advantageous embodiment of the invention, the body has a substantially cylindrical shape, preferably the body has a general shape of a circular cylinder, and the body comprises an internal cavity that extends in the longitudinal direction of the body, and at least one first or second opening is directed towards said cavity so that the gas flow at least partly is led via said cavity. An advantageous effect of this design is that the device require less space. A further advantage, especially in a vehicle exhaust gas purification application, is that the device can be made with a long and narrow physical shape that can be arranged with its longitudinal axis in line with the exhaust pipe. By distributing the gas flow passages around the internal cavity and/or along the longitudinal axis of the body, this design enables a low pressure drop and advantageous packing properties.

**BRIEF DESCRIPTION OF THE DRAWINGS:**

2002-02-15

Hans-Joachim Kausch

The invention will now be described in more detail with reference to the following drawings where:

- Figure 1 in an overview shows an example of a method for producing and constructing a gas treatment device according to a first advantageous embodiment of the invention,
- Figure 2 shows in more detail the first advantageous embodiment of the invention according to figure 1,
- Figure 3 shows, in an exploded perspective view, a second advantageous embodiment of the invention,
- Figure 4 shows a schematic sectional view of a variant of the second advantageous embodiment of the invention according to figure 3,
- Figure 5 shows a sectional view A-A according to figure 4,
- Figure 6 shows a sectional view B-B according to figure 4,
- Figure 7 shows a sectional view C-C according to figure 4
- Figure 8 shows a sectional view D-D according to figure 4,
- Figure 9 shows a sectional view A-A according to figure 4 of an alternative variant of the second advantageous embodiment of the invention,
- Figure 10 shows a sectional view B-B according to figure 4 corresponding to the variant shown in figure 9, and
- Figure 11 shows a further development of the second embodiment of the invention according to figures 3 and 4.

#### DETAILED DESCRIPTION OF THE INVENTION:

Figure 1 shows in an overview an example of a method for producing and constructing a gas treatment device according to a first advantageous embodiment of the invention. A strip 1 is folded into a zig-zag structure 2. Spacer means in the form of corrugated plates 9 are arranged between the foldings 10 of the zig-zag structure 2 in such a way that a distance is achieved between two foldings 10 that face each other in the zig-zag structure 2. This distance makes it possible to feed a gas flow between the foldings 10. The corrugated plates 9 are arranged to leave some central space free from spacer means. This free space forms a part of a distribution section 26 that will be further described in relation to figure 2. The zig-zag structure 2 may be formed to bodies of different geometrical shapes, depending on e.g. the application of the device. In figure 1 the zig-zag structure 2 forms a body 3 with the shape of a bundle. The body 3 is placed into a casing 6 that encloses the body 3, and the casing 6 is provided with a



2002-02-15

Huvudföreläsning

first opening 4 for entrance of an incoming gas flow to the body 3 and a second opening 5 for the exit of an outgoing gas flow from the body 3. Sealings 7 prevent gas from flowing under or over the body 3. In order to adapt the body 3 to cause a conversion in the composition of the gas, at least a part of the surfaces of the body 3 that are in contact with the gas flow are preferably coated with a catalyst material.

Figure 2 shows in more detail the first advantageous embodiment of the invention according to figure 1. For the sake of clarity, the zig-zag structure is partly unfolded. Due to the arrangement of the corrugated plates 9, a plurality of gas flow passages 11a, 11b are formed between the foldings 10 in the body 3. Every second of said gas flow passages 11a, 11b are open to the first opening 4; referred to as the gas flow inlet passages 11a. The other passages, the gas flow outlet passages 11b, are open to the second opening 5. The incoming gas is fed via the first opening 4 into the distribution section 26 in which it divides into two main flows with opposite directions (to the left and to the right as seen from the direction of the incoming gas flow) and enters the inlet passages 11a in each of the gas flow passage sections 27. At both ends of the casing 6 the gas flow enters a reversing chamber 13 where the gas leaves the inlet passages 11a and enters the outlet passages 11b through which the gas flows to the second opening 5 and exits the casing 6. A counter-current heat exchange is thus permitted between adjacent gas flow passages.

20

Inside the first opening 4 the distribution section 26 is located, in which section the corrugated plates 9 are arranged to facilitate the distribution of the incoming gas flow over the width of the gas flow inlet passages 11a. As mentioned above, the distribution section 26 is in this case formed by a void in the presence of plates 9 so that the incoming gas easily can flow across the inlet passages 11a. Thereby the gas flow can be uniformly distributed over the width of the individual inlet passages 11a. As the gas passes the distribution section 26, it enters a gas flow passage section 27 comprising the corrugated plates 9. Thus, the device comprises one distribution section 26 and two gas flow passage sections 27. In addition, the device comprises two reversing zones in the form of reversing chambers 13. Since the structure of the distribution section 26 in figure 2 is similar inside both the first opening 4 and the second opening 5, the distribution section 26 also facilitates the transport of the outgoing gas flow out from the outlet passages. This feature reduces the pressure drop over the construction.

30

2002-02-15

Hovedlinjen Kassen

The spacer means are not limited to corrugated plates 9, but can for instance comprise a mesh-wire net. Further, the spacer means may exhibit filtering properties for removal of particulates. Filtering material may also be placed in the distance between the foldings 10.

5 As an alternative to spacer means, the surface of the strip 1 may exhibit a three-dimensionell pattern, preferably corrugations, arranged to give rise to contact points and gaps between two foldings 10 that face each other in the zig-zag structure 2. The frequency of the corrugations may for instance differ between adjacent foldings 10. Alternatively, the phase of the corrugations may be shifted between adjacent foldings 10. The gas flow passages 11a, 11b are  
10 thereby formed in the gaps between the foldings 10. Preferably, said three-dimensionell pattern extends over an area of the foldings 10 corresponding to the area covered by the corrugated plates 9 in figures 1 and 2. The distribution section 26 can thus be located inside the first opening 4 in a similar way as shown in figure 2. In this distribution section 26, the surfaces of the foldings 10 can be arranged to differ from said three-dimensional pattern, the  
15 surfaces may for instance be substantially non-patterned, so that no, or only a few, contact points are created in the distribution section 26. The effect of this arrangment is similar to what is described above, i.e. that the incoming gas can easily flow across the inlet passages 11a in the distribution section 26 and thereby the gas flow can be uniformly distributed over the width of the inlet passages 11a.

20

A second advantageous embodiment of the invention is shown in figures 3 to 10. In this embodiment the distribution section and the gas flow passage section form separate units that are joined to each other. Figure 3 shows, in an exploded perspective view, the structure of a  
25 body 3 comprising one distribution section 26, two gas flow passage sections 27 and two reversing zones in the form of reversing chambers 13. Each passage section 27 is provided with a plurality of gas flow passages 11 and, compared with the thin walls defining the gas flow passages 11, relatively thick supporting walls 33 that divides the gas flow passage section into a number of sectors. The body 3 has the shape of a circular cylinder and comprises an internal cavity 20 that extends in the longitudinal direction of the body. The  
30 incoming gas flow is fed into the body 3 via the internal cavity 20 and the outgoing gas flow leaves the body 3 via its periphery. These flow processes are further described below.

Figure 4 shows a schematic sectional view of a variant of the second embodiment wherein the body 3 constitutes two sub-bodies that have been joined together, and wherein each sub-body

2002-02-15

... ..

has a structure according to figure 3. The body 3 has also been provided with surrounding equipment for leading the gas to and from the body 3. Figure 5, 6, 7 and 8 shows sectional views A-A, B-B, C-C and D-D, respectively, according to figure 4. The structure of the distribution section 26 is not shown in figure 4, but in figure 5.

5

The incoming gas flow is fed into the body 3 through the first opening 4 into the internal cavity 20. The other end 23 of said cavity 20, opposite to that of the first opening 4, is closed which has the effect that the incoming gas flow is forced through the first openings 4' of each distribution section 26. As can be seen in figure 5, the distribution section 26 constitutes of a wall structure forming (as an example) four first channels 29 that communicate with the internal cavity 20 via the first openings 4' and to which first channels 29 the incoming gas flow is fed. The wall structure further forms a plurality of second channels 30 (in the figure there are, as an example, five in each direction) that extend from each of said first channels 29. As can be seen in figure 6, the gas flow passage section 27 is provided with a plurality of gas flow passages 11a, 11b. Every second of these passages forms an inlet passage 11a intended for an incoming gas flow, and every second passage forms an outlet passage 11b, intended for an outgoing gas flow. Said second channels 30 (fig. 5) are open to the gas flow inlet passages 11a, whereas said first channels 29 are closed to all gas flow passages 11a, 11b by the ends of the supporting walls 33. In order to make it possible to use thinner supporting walls 33 and thereby decrease the amount of construction material in the body, the direct passage from the first channels 29 to the gas flow passages 11a, 11b can be closed by blocking means, for instance thin plates, or by plugging appropriate parts of the passages. As the incoming gas flow is fed through the first openings 4' into the first channels 29, the gas is forced to be distributed into the second channels 30. From the second channels 30, the gas flow is fed to the inlet passages 11a. Further, the gas flows through the inlet passages 11a and enters the reversing chamber 13 allowing the gas flow to change direction and flow back to the distribution section 26 via the outlet passages 11b. The wall structure forming the first channels 29 and the second channels 30 in the distribution section 26 also forms a plurality of third channels 32 (in the figure there are, as an example, five in each direction) between said second channels 30 using common walls. Said third channels 32 are open to the gas flow outlet passages 11b. Two sets of said third channels 32 emerge into a common fourth channel 34. In figure 5 it can be seen that the distribution section 26, as an example, is provided with four fourth channels 34. The outgoing gas flow enters said third channels 32 from the outlet passages 11b and exits the distribution section 26 via said fourth channels 34 and a second

opening 5' into an outlet channel 35 in the periphery of the body 3. At the end of the body 3, opposite to that of the first opening 4, the outlet channels 35 are combined to a common second opening 5 for the exit of the outgoing gas flow from the body 3.

- 5 Figure 7 shows a sectional view of the section comprising the reversing chamber 13. As a variant, the reversing chamber 13 could be divided up into a number of sectors. Figure 7 also shows the internal cavity 20 and the outlet channels 35. Figure 8 shows a sectional view of a delimiting plate 24 located between the two sub-bodies. Such plates 24 can be used to stabilize the construction. As an alternative to what is shown in figure 4, the delimiting plate
- 10 24 may form the end part of the reversing chambers 13 of two adjacent sub-bodies.

- In order to lead the gas to the body 3, a pipe (for instance an exhaust pipe) is preferably inserted through the first opening 4 all the way to the other end 23 of the internal cavity 20. By providing the pipe with openings around its circumference at a location corresponding to
- 15 the location of the distribution section(s) 26, the gas is permitted to flow into the distribution section(s) via the first openings 4'. A pipe provided with openings can also be inserted through the second opening 5 in order to lead the gas away from the body 3. Such inserted pipes can be used to stabilize the construction.

- 20 Figure 9 and 10 show an alternative variant of the second embodiment of the invention. The principal of this variant is similar, but the distribution section and the gas flow passage section has a different internal shape. Figure 9 shows a sectional view A-A according to figure 4 of the alternative distribution section 26', and figure 10 shows a sectional view B-B according to figure 4 of the alternative gas flow passage section 27'. Referring to figure 9, the distribution
- 25 section 26' comprises a zig-zag shaped wall structure forming a first set of channels 40 and a second set of channels 41, one set on each side of said zig-zag shaped structure. The first set of channels 40 are, via the first openings 4', open to the internal cavity 20 and to the gas flow passages that are intended for an incoming gas flow: the inlet passages 11a. The second set of channels 41 are open to the gas flow passages that are intended for an outgoing gas flow: the
- 30 outlet passages 11b, and to the outlet channels 35. The appearance of the gas flow passages 11a, 11b is shown in figure 10, wherein every second passage forms an inlet passage 11a and every second passage forms an outlet passage 11b in similarity to what is mentioned previously. In this variant of the invention, the gas flows in a similar way as described above; it enters the internal cavity 20 via the first opening 4, enters the first set of channels 40 via the

first openings 4', flows through the inlet channels 11a to the reversing chamber 13 where it changes direction and flows through the outlet channels 11b to the second set of channels 41, and passes the second openings 5' into the outlet channels 35.

5 An advantage of using more than one sub-body, as exemplified in figure 4, is that the incoming gas flow can be divided into several smaller gas flows which increases the efficiency of the device and lowers the pressure drop over the construction. Of course, more than two sub-bodies can be arranged together. Other arrangements are also possible, one example is to arrange only one gas flow passage section 27 adjacent to the distribution section  
10 26, and thus to block the other side of the distribution section 26. This arrangement may be used to achieve a higher mechanical stability of the construction. Another alternative is to reverse the direction of the gas flow so that the gas enters the body 3 via the outlet channels 35 and exits the body 3 through the first opening 4.

15 As seen from figures 3 to 10, both the distribution section 26, 26' and the gas flow passage section 27, 27' exhibit a substantially unchanged cross section in the longitudinal direction of the body. This means that these sections may be produced by extruding means which is a cost-effective production method that is suitable both for metal and ceramic material. Preferably, all sections/parts of the construction are made out of a ceramic material and joined  
20 to each other by sintering means. This gives a durable construction. To achieve a heat exchange effect between the inlet and outlet passages, the walls separating the passages must be reasonably thin. For a ceramic material a wall thickness of about 0.1 mm would give a fast heat transfer through the wall compared to the heat transfer from the gas to the wall. An example of a suitable ceramic material is cordierite.

25 Regarding the alternative variant of the second embodiment shown in figures 9 and 10 it is possible to produce/extrude the distribution section 26' and the gas flow passage section 27' in one piece so that the first set of channels 40 forms a part of the inlet passages 11a and the second set of channels 41 forms a part of the outlet channels 11b. The internal cavity 20 and  
30 the openings to the distribution section 26' can in such a case be arranged by inserting a pipe provided with circumferential holes as described previously. Another pipe provided with openings from the distribution section 26' can be arranged on the outside of the channel/passage structure.

A further development of the second embodiment of the invention (figs. 3 and 4) is the adaption of the device to remove particulates in the gas. Figure 11 shows schematically the principles of a gas flow filtering section 36 arranged between a gas flow passage section 27 and the section forming the reversing chamber 13. Although the design of the reversing chamber 13 may be similar to the above descriptions, it has in this case a different function as will be described below. Both the passage section 27 and the filtering section 36 are provided with gas flow inlet and outlet passages 11a, 11b as described above. Plugs 37 close the outlet passages 11b to the reversing chamber 13. The walls 39 between the passages 11a, 11b in the filtering section 36 exhibit a porous structure through which gas can pass but not particles (larger than a certain size), which at least partly will be deposited in the reversing chamber 13. These walls 39 thus work as filters. Due to the plugs 37, a pressure builds up in the reversing chamber 13. The gas flow in the inlet passages 11a is thus forced through the walls 39 in the filtering section 36 into the outlet passages 11b back to the passage section 27, as indicated by arrows in figure 11. Principally, the filtering process could be carried out in the passage section 27, but porous walls in this section would decrease the heat exchange properties. After some time, the filtering walls 39 and the reversing chamber 13 need to be regenerated by combustion of the soot. Due to the heat exchange properties of the invention, the heat evolved in this process can be utilized efficiently in that the outgoing gas preheats the incoming gas in the gas flow passage section 27. As an aid in this process, a heating coil can be placed in the reversing chamber 13. In conventional ceramic particle filters, the ash produced in the soot combustion process accumulates in the filtering channels occupying useful filter volume. According to figure 11, the ash 38 can instead at least partly be accumulated in the reversing chamber 13. In some applications, the volume of the reversing chamber 13 is sufficient for accumulating ash 38 during the service life of the gas treatment device. In other cases it is possible to provide the reversing chamber 13 with emptying means, such as an opening that is closed under normal operation.

The filtering section 36 shown in figure 11 is easily adapted to fit between the gas flow passage section 27 and the section forming the reversing chamber 13 shown in figures 3 and 4. Further, the principal shape of the filtering section 36 is the same as that of the passage section 27. Thus, also the filtering section 36 exhibits a substantially unchanged cross section in a certain direction and may therefore be produced by extruding means, be made out of a ceramic material, and joined by sintering to other ceramic sections. The plugs 37 can be arranged by conventional means during or after the extrudation process. Of course, the

2002 FEB 15

Hingulipon Kanan

filtering section 36 can be adapted to be used together with the alternative gas flow passage section 27' shown in figure 10.

Although the use of the ash-accumulating reversing chamber 13 is advantageous, it is also possible to use the filtering section 36 without the reversing chamber 13 e.g. by plugging also the inlet passages 11a or by substituting the reversing chamber 13 for a delimiting plate 24.

An advantage of using a counter-current heat exchange in the treatment of a gas flow according to the invention is that the heat can be utilized very efficiently. Besides the amount of heat contained in the incoming gas, heat may be supplied to the gas from exothermic reactions in the body, preferably by using a catalyst material that has been coated onto at least a part of the surfaces in the body that are in contact with the gas flow. Heat may also be supplied by an external source such as a heat generator preferably arranged in the reversing zone. As the outgoing gas flow during its transport from the reversing chamber 13 to the second opening 5, 5' can transfer a great deal of its heat to the incoming gas flow from the first opening 4, 4' to the reversing chamber 13, only a small part of the supplied heat will leave the body 3 with the outgoing gas flow and thus be wasted. A good heat economy is especially important if the incoming gas flow is relatively cold so that the temperature might fall below the catalyst light-off temperature described previously. An example of this is when the device is applied to purify the exhaust gases of a diesel engine.

The heat exchange process according to the invention is also very useful in temperature transient situations, such as the purification of exhaust gases during a cold start situation. In such an application of the invention, the body 3 is preferably provided with both a catalyst material and an adsorption/desorption agent applied to at least a part of the surfaces in the body 3 that are in contact with the gas flow. Said agent preferably adsorbs hydrocarbons and/or nitrogen oxides at, or below, a first temperature and releases them at, or above, a second temperature which is higher than the first temperature. As the exhaust gases enters the cold body 3, heat will be transferred from the gas to the material comprised in the body 3. The first part of the heat exchanger surfaces, i.e. the material in or close to the distribution section 26 located closest to the first opening 4, 4', heats up quickly while the part close to the reversing chamber 13 heats up slowly. As the body is arranged to permit heat exchange between adjacent passages, also the heat exchanger surfaces closest to the second opening 5, 5' will heat up quickly. A gas flow passing the device shortly after start up will thus

FEB 15

Howardsson Kesson

experience a first hot zone at the entrance of the body 3, a zone with gradually decreasing temperature (the inlet passages 11a), a zone with gradually increasing temperature (the outlet passages 11b), and a second hot zone before exit out of the body 3. Compounds adsorbed onto adsorption/desorption agents applied to surfaces in the first hot zone will relatively quickly desorb, but will be adsorbed again onto agents applied to colder surfaces close to the reversing chamber 13. As the temperature with time also increases close to the reversing chamber 13, the compounds will again desorb. This time, however, the compounds will be transported towards zones with higher temperatures. By properly designing the body and choosing catalyst material and adsorption/desorption agents, the temperature in at least the hottest zone will be above the catalyst light-off temperature so that the compounds are converted efficiently.

In order to improve the heat economy and to reduce the amounts of adsorption/desorption agents and catalysts required, one may carefully choose the body surfaces to which catalysts and agents should be applied. For instance, catalysts for oxidizing HC and CO and reducing NO<sub>x</sub> may chiefly be applied in the hotter zones of the body (in or close to the distribution section 26), and adsorption/desorption agents may chiefly be applied in the colder zones (in or close to the reversing chamber 13).

In order to control the temperature of the gas flow in the body, the device preferably comprises one or several of the following: a heat generator arranged in the body (preferably arranged in the reversing chamber), cooling flanges arranged in the body, arrangements for introducing cooling air into the body, and/or a system for controlling the composition of the incoming gas flow. Said system preferably comprises an arrangement for introduction of oxidizing species, such as air, into the incoming gas flow, and/or an arrangement for introduction of oxidizable species, such as hydrocarbons, into the incoming gas flow. Due to the heat exchange properties of the device, the heat generated in the induced chemical reactions can effectively be taken care of.

If the device is arranged in connection to an engine, said system for controlling the composition of the incoming gas flow preferably comprises an arrangement for controlling the operation of the engine, which operation in turn can affect the composition of the incoming gas flow. For instance, by mixing additional amounts of fuel in one or several of the



Erling Olsson Kärstén

cylinders one may introduce fuel, i.e. hydrocabons, into the exhaust gas that is to be purified in the gas treatment device.

The distribution section(s) is thus primarily adapted to distribute the incoming gas flow to the gas flow passages, the passage section(s) is primarily adapted to permit heat exchange and to cause a conversion in the composition of the gas, and the filtering section(s) is primarily adapted to remove particulates from the gas. Of course, this does not prevent that, for instance, heat exchange or gas conversion takes place in a distribution section, or that heat exchange takes place in a filtering section.

The invention is not limited to the above described embodiments, but a number of modifications are possible within the frame of the following claims. For instance, the reversing zone may be designed in different ways. One example is to substitute the reversing chamber 13 for transfer passages, e.g. holes, between the gas flow inlet and outlet passages.

Further, the first embodiment of the invention is not limited to the variant shown in figures 1 and 2. The zig-zag structure 2 can for instance be shaped to other geometrical structures. One example is to distribute the foldings 10 uniformly around an internal cavity so that the zig-zag structure 2 takes the form of a circular cylinder with a longitudinal internal cavity. The gas can thus be fed to the body via the cavity. A variant of this is to form a discret distribution of the foldings around the cavity wherein a number of sub-bodies is distributed around the cavity. The shape of the distribution section 26, i.e. the shape of the corrugated plates 9, may also be modified to suit different applications. Seen in the direction of the incoming gas flow, the distribution section 26 may for instance be narrowing or expanding.

Regarding the second embodiment of the invention it is possible to use a conventional monolith with a large number of narrow flow passages (and provided with the internal cavity 20) as an alternative to the gas flow passage sections 27, 27' shown in figures 6 and 10. Each of the gas flow passages in figures 6 or 10 would in such a case be substituted for a number of more narrow passages side by side. With a proper design, this arrangement would give a more stable construction and only have a slight effect on the heat exchange (due to the additional body content of material required for the additional walls). However, it would increase the pressure drop and require more material.

2002-02-15

Hörselörens Kassen

**CLAIMS:**

1. A device for treatment of a gas flow, comprising  
at least one body (3), at least one first opening (4, 4') for entrance of an incoming gas flow to  
5 said body (3) and at least one second opening (5, 5') for the exit of an outgoing gas flow from  
said body (3), wherein said body (3) is provided with a plurality of gas flow passages (11a,  
11b) arranged to permit heat exchange between the gas flows in adjacent passages,  
characterized in  
that the device comprises at least one distribution section (26, 26') in communication with the  
10 first opening (4, 4') and with the gas flow passages (11a, 11b) to distribute the incoming gas  
flow to the gas flow passages (11a, 11b), and at least one gas flow passage section (27, 27')  
including said gas flow passages (11a, 11b), which passage section (27, 27') primarily is  
adapted to permit heat exchange and to cause a conversion in the composition of the gas.
- 15 2. A device according to claim 1,  
characterized in  
that the distribution section (26, 26') is adapted to distribute the incoming gas flow within the  
individual gas flow passages (11a, 11b).
- 20 3. A device according to claim 2,  
characterized in  
that the distribution section (26, 26') is adapted to bring about a substantially uniform gas flow  
within the individual gas flow passages (11a, 11b).
- 25 4. A device according to anyone of the preceding claims,  
characterized in  
that the distribution section (26, 26') forms a part of the body (3).
- 30 5. A device according to anyone of the preceding claims,  
characterized in  
that the distribution section (26, 26') is in communication with the second opening (5, 5') to  
also lead the outgoing gas flow out from the gas flow passages (11a, 11b).

6. A device according to anyone of the preceding claims,  
characterized in  
that the gas flow passages (11a, 11b) extend essentially parallel to each other.
- 5 7. A device according to claim 6,  
characterized in  
that the main direction of the gas flow in one gas flow passage (11a, 11b) is essentially the  
opposite of the main direction of the gas flow in at least one of the adjacent gas flow passages  
(11b, 11a).
- 10 8. A device according to claim 7,  
characterized in  
that said gas flow passages (11a, 11b) form inlet passages (11a) that are intended for an  
incoming gas flow and outlet passages (11b) that are intended for an outgoing gas flow, and  
15 that a reversing zone (13) is arranged so that gas entering said reversing zone (13) from the  
inlet passages (11a) is permitted to change direction and flow back through the outlet  
passages (11b).
9. A device according to claim 8,  
20 characterized in  
that the reversing zone comprises a reversing chamber (13).
10. A device according to anyone of the preceding claims,  
characterized in  
25 that the body (3) comprises a strip (1) that is folded into a zig-zag structure (2), and that  
spacer means (9) are arranged between the foldings (10) of the zig-zag structure (2) in such a  
way that a distance is achieved between two foldings (10) that face each other in the zig-zag  
structure (2), and that the gas flow passages (11a, 11b) thereby are formed between the  
foldings (10) of the zig-zag structure (2), and that said spacer means (9) are arranged to  
30 facilitate the distribution of the incoming gas flow in the distribution section (26).

11. A device according to anyone of claims 1 to 9,  
characterized in  
that the body (3) comprises a strip (1) that is folded into a zig-zag structure (2), and that the  
surface of the strip (1) at least partly exhibits a three-dimensional pattern, preferably  
5 corrugations, and that said three-dimensional pattern is arranged to give rise to contact points  
and gaps between two foldings (10) that face each other in the zig-zag structure (2), and that  
the gas flow passages (11a, 11b) thereby are formed in the gaps between the foldings (10) of  
the zig-zag structure (2), and that the surface of at least one of two foldings (10) that face each  
other differ from said three-dimensional pattern in the distribution section (26) in such a way  
10 that the distribution of the incoming gas flow is facilitated.

12. A device according to claim 10 or 11,  
characterized in  
that a casing (6) provided with said first opening (4) and said second opening (5) encloses the  
15 zig-zag structure (2).

13. A device according to anyone of claims 1-9,  
characterized in  
that the distribution section (26, 26') and the gas flow passage section (27, 27') form separate  
20 units that are arranged together in such a way that gas can flow from one section to the other,  
preferably the distribution section (26, 26') and the gas flow passage section (27, 27') are  
joined to each other.

14. A device according to claim 13,  
25 characterized in  
that the distribution section (26) comprises a wall structure forming:  
at least one first channel (29) to which the incoming gas flow is fed;  
and a plurality of second channels (30) that extend from said first channel (29) and which  
second channels (30) are open to the gas flow passages (11a, 11b) that are intended for an  
30 incoming gas flow.

15. A device according to claim 14,  
characterized in  
that said first channel (29) is closed to the gas flow passages (11a, 11b).

6-11-68

0-2-65-15

How'd you know?

**16. A device according to claim 14 or 15,**

characterized in

that the wall structure forms a plurality of third channels (32) that are open to the gas flow

5 passages (11a, 11b) that are intended for an outgoing gas flow, preferably said third channels (32) are formed between said second channels (30) using common walls.

**17. A device according to claim 13,**

characterized in

10 that the distribution section (26') comprises a zig-zag shaped wall structure forming a first and a second set of channels (40, 41), one set on each side of said zig-zag shaped structure,

wherein said first set of channels (40) are open to the gas flow passages (11a, 11b) that are intended for an incoming gas flow and said second set of channels (41) are open to the gas flow passages (11a, 11b) that are intended for an outgoing gas flow, and wherein the

15 incoming gas flow is fed to the first set of channels (40).

**18. A device according to anyone of claims 13 to 17,**

characterized in

that the distribution section (26, 26') in at least one certain direction exhibit a substantially  
20 unchanged cross section.

**19. A device according to claim 18,**

characterized in

that the distribution section (26, 26') is produced by extruding means.

25

**20. A device according to anyone of claims 13 to 19,**

characterized in

that the distribution section (26, 26') and the gas flow passage section (27, 27') are made out of a ceramic material, and that the sections are joined to each other by sintering means.

30

**21. A device according to any of the preceding claims,**

characterized in

that the body (3) has a substantially cylindrical shape, preferably the body (3) has a general shape of a circular cylinder, and that the body (3) comprises an internal cavity (20) that

Hans-Joachim Kossan

extends in the longitudinal direction of the body (3), and that at least one first (4, 4') or second (5, 5') opening is directed towards said cavity (20) so that the gas flow at least partly is led via said cavity (20).

5 22. A device according to any of the preceding claims,  
characterized in

that the device comprises at least one filtering section (36), which filtering section (36) primarily is adapted to remove particulates from the gas.

10 23. A device according to any of the preceding claims,  
characterized in

that at least a part of the surfaces in the body (3) that are in contact with the gas flow are coated with a catalyst material.

15 24. A device according to any of the preceding claims,  
characterized in

that at least a part of the surfaces in the body (3) that are in contact with the gas flow are coated with an adsorption/desorption agent.

20 25. A device according to any of the preceding claims,  
characterized in

that the device comprises means for controlling the temperature of the gas flow in the body (3), said means comprising one or several of the following:

- a heat generator arranged in the body (3)
- 25 - cooling flanges arranged in the body (3)
- arrangements for introducing cooling air into the body (3)
- a system for controlling the composition of the incoming gas flow.

30 26. A device according to claim 25,  
characterized in

that said system for controlling the composition of the incoming gas flow comprises one or both of the following:

- an arrangement for introduction of oxidizing species, such as air, into the incoming gas flow

FIG. 15

FIG. 15 (continued)

- an arrangement for introduction of oxidizable species, such as hydrocarbons, into the incoming gas flow.

27. A device according to claim 25,

5 characterized in

that the device is arranged in connection to a combustion engine, and that said system for controlling the composition of the incoming gas flow comprises an arrangement for controlling the operation of the combustion engine, which operation in turn affects the composition of the incoming gas flow.

10

28. A device according to any of the preceding claims,

characterized in

that the device is adapted to purify the exhaust gas from an internal combustion engine, preferably in a mobile application.

15

1  
2  
3  
4  
5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48  
49  
50  
51  
52  
53  
54  
55  
56  
57  
58  
59  
60  
61  
62  
63  
64  
65  
66  
67  
68  
69  
70  
71  
72  
73  
74  
75  
76  
77  
78  
79  
80  
81  
82  
83  
84  
85  
86  
87  
88  
89  
90  
91  
92  
93  
94  
95  
96  
97  
98  
99  
100  
101  
102  
103  
104  
105  
106  
107  
108  
109  
110  
111  
112  
113  
114  
115  
116  
117  
118  
119  
120  
121  
122  
123  
124  
125  
126  
127  
128  
129  
130  
131  
132  
133  
134  
135  
136  
137  
138  
139  
140  
141  
142  
143  
144  
145  
146  
147  
148  
149  
150  
151  
152  
153  
154  
155  
156  
157  
158  
159  
160  
161  
162  
163  
164  
165  
166  
167  
168  
169  
170  
171  
172  
173  
174  
175  
176  
177  
178  
179  
180  
181  
182  
183  
184  
185  
186  
187  
188  
189  
190  
191  
192  
193  
194  
195  
196  
197  
198  
199  
200  
201  
202  
203  
204  
205  
206  
207  
208  
209  
210  
211  
212  
213  
214  
215  
216  
217  
218  
219  
220  
221  
222  
223  
224  
225  
226  
227  
228  
229  
230  
231  
232  
233  
234  
235  
236  
237  
238  
239  
240  
241  
242  
243  
244  
245  
246  
247  
248  
249  
250  
251  
252  
253  
254  
255  
256  
257  
258  
259  
260  
261  
262  
263  
264  
265  
266  
267  
268  
269  
270  
271  
272  
273  
274  
275  
276  
277  
278  
279  
280  
281  
282  
283  
284  
285  
286  
287  
288  
289  
290  
291  
292  
293  
294  
295  
296  
297  
298  
299  
300  
301  
302  
303  
304  
305  
306  
307  
308  
309  
310  
311  
312  
313  
314  
315  
316  
317  
318  
319  
320  
321  
322  
323  
324  
325  
326  
327  
328  
329  
330  
331  
332  
333  
334  
335  
336  
337  
338  
339  
340  
341  
342  
343  
344  
345  
346  
347  
348  
349  
350  
351  
352  
353  
354  
355  
356  
357  
358  
359  
360  
361  
362  
363  
364  
365  
366  
367  
368  
369  
370  
371  
372  
373  
374  
375  
376  
377  
378  
379  
380  
381  
382  
383  
384  
385  
386  
387  
388  
389  
390  
391  
392  
393  
394  
395  
396  
397  
398  
399  
400  
401  
402  
403  
404  
405  
406  
407  
408  
409  
410  
411  
412  
413  
414  
415  
416  
417  
418  
419  
420  
421  
422  
423  
424  
425  
426  
427  
428  
429  
430  
431  
432  
433  
434  
435  
436  
437  
438  
439  
440  
441  
442  
443  
444  
445  
446  
447  
448  
449  
450  
451  
452  
453  
454  
455  
456  
457  
458  
459  
460  
461  
462  
463  
464  
465  
466  
467  
468  
469  
470  
471  
472  
473  
474  
475  
476  
477  
478  
479  
480  
481  
482  
483  
484  
485  
486  
487  
488  
489  
490  
491  
492  
493  
494  
495  
496  
497  
498  
499  
500  
501  
502  
503  
504  
505  
506  
507  
508  
509  
510  
511  
512  
513  
514  
515  
516  
517  
518  
519  
520  
521  
522  
523  
524  
525  
526  
527  
528  
529  
530  
531  
532  
533  
534  
535  
536  
537  
538  
539  
540  
541  
542  
543  
544  
545  
546  
547  
548  
549  
550  
551  
552  
553  
554  
555  
556  
557  
558  
559  
560  
561  
562  
563  
564  
565  
566  
567  
568  
569  
570  
571  
572  
573  
574  
575  
576  
577  
578  
579  
580  
581  
582  
583  
584  
585  
586  
587  
588  
589  
590  
591  
592  
593  
594  
595  
596  
597  
598  
599  
600  
601  
602  
603  
604  
605  
606  
607  
608  
609  
610  
611  
612  
613  
614  
615  
616  
617  
618  
619  
620  
621  
622  
623  
624  
625  
626  
627  
628  
629  
630  
631  
632  
633  
634  
635  
636  
637  
638  
639  
640  
641  
642  
643  
644  
645  
646  
647  
648  
649  
650  
651  
652  
653  
654  
655  
656  
657  
658  
659  
660  
661  
662  
663  
664  
665  
666  
667  
668  
669  
670  
671  
672  
673  
674  
675  
676  
677  
678  
679  
680  
681  
682  
683  
684  
685  
686  
687  
688  
689  
690  
691  
692  
693  
694  
695  
696  
697  
698  
699  
700  
701  
702  
703  
704  
705  
706  
707  
708  
709  
710  
711  
712  
713  
714  
715  
716  
717  
718  
719  
720  
721  
722  
723  
724  
725  
726  
727  
728  
729  
730  
731  
732  
733  
734  
735  
736  
737  
738  
739  
740  
741  
742  
743  
744  
745  
746  
747  
748  
749  
750  
751  
752  
753  
754  
755  
756  
757  
758  
759  
760  
761  
762  
763  
764  
765  
766  
767  
768  
769  
770  
771  
772  
773  
774  
775  
776  
777  
778  
779  
780  
781  
782  
783  
784  
785  
786  
787  
788  
789  
790  
791  
792  
793  
794  
795  
796  
797  
798  
799  
800  
801  
802  
803  
804  
805  
806  
807  
808  
809  
810  
811  
812  
813  
814  
815  
816  
817  
818  
819  
820  
821  
822  
823  
824  
825  
826  
827  
828  
829  
830  
831  
832  
833  
834  
835  
836  
837  
838  
839  
840  
841  
842  
843  
844  
845  
846  
847  
848  
849  
850  
851  
852  
853  
854  
855  
856  
857  
858  
859  
860  
861  
862  
863  
864  
865  
866  
867  
868  
869  
870  
871  
872  
873  
874  
875  
876  
877  
878  
879  
880  
881  
882  
883  
884  
885  
886  
887  
888  
889  
890  
891  
892  
893  
894  
895  
896  
897  
898  
899  
900  
901  
902  
903  
904  
905  
906  
907  
908  
909  
910  
911  
912  
913  
914  
915  
916  
917  
918  
919  
920  
921  
922  
923  
924  
925  
926  
927  
928  
929  
930  
931  
932  
933  
934  
935  
936  
937  
938  
939  
940  
941  
942  
943  
944  
945  
946  
947  
948  
949  
950  
951  
952  
953  
954  
955  
956  
957  
958  
959  
960  
961  
962  
963  
964  
965  
966  
967  
968  
969  
970  
971  
972  
973  
974  
975  
976  
977  
978  
979  
980  
981  
982  
983  
984  
985  
986  
987  
988  
989  
990  
991  
992  
993  
994  
995  
996  
997  
998  
999  
1000  
1001  
1002  
1003  
1004  
1005  
1006  
1007  
1008  
1009  
1010  
1011  
1012  
1013  
1014  
1015  
1016  
1017  
1018  
1019  
1020  
1021  
1022  
1023  
1024  
1025  
1026  
1027  
1028  
1029  
1030  
1031  
1032  
1033  
1034  
1035  
1036  
1037  
1038  
1039  
1040  
1041  
1042  
1043  
1044  
1045  
1046  
1047  
1048  
1049  
1050  
1051  
1052  
1053  
1054  
1055  
1056  
1057  
1058  
1059  
1060  
1061  
1062  
1063  
1064  
1065  
1066  
1067  
1068  
1069  
1070  
1071  
1072  
1073  
1074  
1075  
1076  
1077  
1078  
1079  
1080  
1081  
1082  
1083  
1084  
1085  
1086  
1087  
1088  
1089  
1090  
1091  
1092  
1093  
1094  
1095  
1096  
1097  
1098  
1099  
1100  
1101  
1102  
1103  
1104  
1105  
1106  
1107  
1108  
1109  
1110  
1111  
1112  
1113  
1114  
1115  
1116  
1117  
1118  
1119  
1120  
1121  
1122  
1123  
1124  
1125  
1126  
1127  
1128  
1129  
1130  
1131  
1132  
1133  
1134  
1135  
1136  
1137  
1138  
1139  
1140  
1141  
1142  
1143  
1144  
1145  
1146  
1147  
1148  
1149  
1150  
1151  
1152  
1153  
1154  
1155  
1156  
1157  
1158  
1159  
1160  
1161  
1162  
1163  
1164  
1165  
1166  
1167  
1168  
1169  
1170  
1171  
1172  
1173  
1174  
1175  
1176  
1177  
1178  
1179  
1180  
1181  
1182  
1183  
1184  
1185  
1186  
1187  
1188  
1189  
1190  
1191  
1192  
1193  
1194  
1195  
1196  
1197  
1198  
1199  
1200  
1201  
1202  
1203  
1204  
1205  
1206  
1207  
1208  
1209  
1210  
1211  
1212  
1213  
1214  
1215  
1216  
1217  
1218  
1219  
1220  
1221  
1222  
1223  
1224  
1225  
1226  
1227  
1228  
1229  
1230  
1231  
1232  
1233  
1234  
1235  
1236  
1237  
1238  
1239  
1240  
1241  
1242  
1243  
1244  
1245  
1246  
1247  
1248  
1249  
1250  
1251  
1252  
1253  
1254  
1255  
1256  
1257  
1258  
1259  
1260  
1261  
1262  
1263  
1264  
1265  
1266  
1267  
1268  
1269  
1270  
1271  
1272  
1273  
1274  
1275  
1276  
1277  
1278  
1279  
1280  
1281  
1282  
1283  
1284  
1285  
1286  
1287  
1288  
1289  
1290  
1291  
1292  
1293  
1294  
1295  
1296  
1297  
1298  
1299  
1300  
1301  
1302  
1303  
1304  
1305  
1306  
1307  
1308  
1309  
1310  
1311  
1312  
1313  
1314  
1315  
1316  
1317  
1318  
1319  
1320  
1321  
1322  
1323  
1324  
1325  
1326  
1327  
1328  
1329  
1330  
1331  
1332  
1333  
1334  
1335  
1336  
1337  
1338  
1339  
1340  
1341  
1342  
1343  
1344  
1345  
1346  
1347  
1348  
1349  
1350  
1351  
1352  
1353  
1354  
1355  
1356  
1357  
1358  
1359  
1360  
1361  
1362  
1363  
1364  
1365  
1366  
1367  
1368  
1369  
1370  
1371  
1372  
1373  
1374  
1375  
1376  
1377  
1378  
1379  
1380  
1381  
1382  
1383  
1384  
1385  
1386  
1387  
1388  
1389  
1390  
1391  
1392  
1393  
1394  
1395  
1396  
1397  
1398  
1399  
1400  
1401  
1402  
1403  
1404  
1405  
1406  
1407  
1408  
1409  
1410  
1411  
1412  
1413  
1414  
1415  
1416  
1417  
1418  
1419  
1420  
1421  
1422  
1423  
1424  
1425  
1426  
1427  
1428  
1429  
1430  
1431  
1432  
1433  
1434  
1435  
1436  
1437  
1438  
1439  
1440  
1441  
1442  
1443  
1444  
1445  
1446  
1447  
1448  
1449  
1450  
1451  
1452  
1453  
1454  
1455  
1456  
1457  
1458  
1459  
1460  
1461  
1462  
1463  
1464  
1465  
1466  
1467  
1468  
1469  
1470  
1471  
1472  
1473  
1474  
1475  
1476  
1477  
1478  
1479  
1480  
1481  
1482  
1483  
1484  
1485  
1486  
1487  
1488  
1489  
1490  
1491  
1492  
1493  
1494  
1495  
1496  
1497  
1498  
1499  
1500  
1501  
1502  
1503  
1504  
1505  
1506  
1507  
1508  
1509  
1510  
1511  
1512  
1513  
1514  
1515  
1516  
1517  
1518  
1519  
1520  
1521  
1522  
1523  
1524  
1525  
1526  
1527  
1528  
1529  
1530  
1531  
1532  
1533  
1534  
1535  
1536  
1537  
1538  
1539  
1540  
1541  
1542  
1543  
1544  
1545  
1546  
1547  
1548  
1549  
1550  
1551  
1552  
1553  
1554  
1555  
1556  
1557  
1558  
1559  
1560  
1561  
1562  
1563  
1564  
1565  
1566  
1567  
1568  
1569  
1570  
1571  
1572  
1573  
1574  
1575  
1576  
1577  
1578  
1579  
1580  
1581  
1582  
1583  
1584  
1585  
1586  
1587  
1588  
1589  
1590  
1591  
1592  
1593  
1594  
1595  
1596  
1597  
1598  
1599  
1600  
1601  
1602  
1603  
1604  
1605  
1606  
1607  
1608  
1609  
1610  
1611  
1612  
1613  
1614  
1615  
1616  
1617  
1618  
1619  
1620  
1621  
1622  
1623  
1624  
1625  
1626  
1627  
1628  
1629  
1630  
1631  
1632  
1633  
1634  
1635  
1636  
1637  
1638  
1639  
1640  
1641  
1642  
1643  
1644  
1645  
1646  
1647  
1648  
1649  
1650  
1651  
1652  
1653  
1654  
1655  
1656  
1657  
1658  
1659  
1660  
1661  
1662  
1663  
1664  
1665  
1666  
1667  
1668  
1669  
1670  
1671  
1672  
1673  
1674  
1675  
1676  
1677  
1678  
1679  
1680  
1681  
1682  
1683  
1684  
1685  
1686  
1687  
1688  
1689  
1690  
1691  
1692  
1693  
1694  
1695  
1696  
1697  
1698  
1699  
1700  
1701  
1702  
1703  
1704  
1705  
1706  
1707  
1708  
1709  
1710  
1711  
1712  
1713  
1714  
1715  
1716  
1717  
1718  
1719  
1720  
1721  
1722  
1723  
1724  
1725  
1726  
1727  
1728  
1729  
1730  
1731  
1732  
1733  
1734  
1735  
1736  
1737  
1738  
1739  
1740  
1741  
1742  
1743  
1744  
1745  
1746  
1747  
1748  
1749  
1750  
1751  
1752  
1753  
1754  
1755  
1756  
1757  
1758  
1759  
1760  
1761  
1762  
1763  
1764  
1765  
1766  
1767  
1768  
1769  
1770  
1771  
1772  
1773  
1774  
1775  
1776  
1777  
1778  
1779  
1780  
1781  
1782  
1783  
1784  
1785  
1786  
1787  
1788  
1789  
1790  
1791  
1792  
1793  
1794  
1795  
1796  
1797  
1798  
1799  
1800  
1801  
1802  
1803  
1804  
1805  
1806  
1807  
1808  
1809  
1810  
1811  
1812  
1813  
1814  
1815  
1816  
1817  
1818  
1819  
1820  
1821  
1822  
1823  
1824  
1825  
1826  
1827  
1828  
1829  
1830  
1831  
1832  
1833  
1834  
1835  
1836  
1837  
1838  
1839  
1840  
1841  
1842  
1843  
1844  
1845  
1846  
1847  
1848  
1849  
1850  
1851  
1852  
1853  
1854  
1855  
1856  
1857  
1858  
1859  
1860  
1861  
1862  
1863  
1864  
1865  
1866  
1867  
1868  
1869  
1870  
1871  
1872  
1873  
1874  
1875  
1876  
1877  
1878  
1879  
1880  
1881  
1882  
1883  
1884  
1885  
1886  
1887  
1888  
1889  
1890  
1891  
1892  
1893  
1894  
1895  
1896  
1897  
1898  
1899  
1900  
1901  
1902  
1903  
1904  
1905  
1906  
1907  
1908  
1909  
1910  
1911  
1912  
1913  
1914  
1915  
1916  
1917  
1918  
1919  
1920  
1921  
1922  
1923  
1924  
1925  
1926  
1927  
1928  
1929  
1930  
1931  
1932  
1933  
1934  
1935  
1936  
1937  
1938  
1939  
1940  
1941  
1942  
1943  
1944  
1945  
1946  
1947  
1948  
1949  
1950  
1951  
1952  
1953  
1954  
1955  
1956  
1957  
1958  
1959  
1960  
1961  
1962  
1963  
1964  
1965  
1966  
1967  
1968  
1969  
1970  
1971  
1972  
1973  
1974  
1975  
1976  
1977  
1978  
1979  
1980  
1981  
1982  
1983  
1984  
1985  
1986  
1987  
1988  
1989  
1990  
1991  
1992  
1993  
1994  
1995  
1996  
1997  
1998  
1999  
2000  
2001  
2002  
2003  
2004  
2005  
2006  
2007  
2008  
2009  
2010  
2011  
2012  
2013  
2014  
2015  
2016  
2017  
2018  
2019  
2020  
2021  
2022  
2023  
2024  
2025  
2026  
2027  
2028  
2029  
2030  
2031  
2032  
2033  
2034  
2035  
2036  
2037  
2038  
2039  
2040  
2041  
2042  
2043  
2044  
2045  
2046  
2047  
2048  
2049  
2050  
2051  
2052  
2053  
2054  
2055  
2056  
2057  
2058  
2059  
2060  
2061  
2062  
2063  
2064  
2065  
2066  
2067  
2068  
2069  
2070  
2071  
2072  
2073  
2074  
2075  
2076  
2077  
2078  
2079  
2080  
2081  
2082  
2083  
2084  
2085  
2086  
2087  
2088  
2089  
2090  
2091  
2092  
2093  
2094  
2095  
2096  
2097  
2098  
2099  
2100  
2101  
2102  
2103  
2104  
2105  
2106  
2107  
2108  
2109  
2110  
2111  
2112  
2113  
2114  
2115  
2116  
2117  
2118  
2119  
2120  
2121  
2122  
2123  
2124  
2125  
2126  
2127  
2128  
2129  
2130  
2131  
2132  
2133  
2134  
2135  
2136  
2137  
2138  
2139  
2140  
2

**ABSTRACT:**

The invention concerns a device for treatment of a gas flow, comprising at least one body (3), at least one first opening (4, 4') for entrance of an incoming gas flow to said body (3) and at least one second opening (5, 5') for the exit of an outgoing gas flow from said body (3),  
5 wherein said body (3) is provided with a plurality of gas flow passages (11a, 11b) arranged to permit heat exchange between the gas flows in adjacent passages. The invention is characterized in that the device comprises at least one distribution section (26, 26') in communication with the first opening (4, 4') and with the gas flow passages (11a, 11b) to distribute the incoming gas flow to the gas flow passages (11a, 11b), and at least one gas flow  
10 passage section (27, 27') including said gas flow passages (11a, 11b), which passage section (27, 27') primarily is adapted to permit heat exchange and to cause a conversion in the composition of the gas.

(Figure 3)



RECEIVED 1970  
JAN 15  
PUBLISHED 1970

1/8


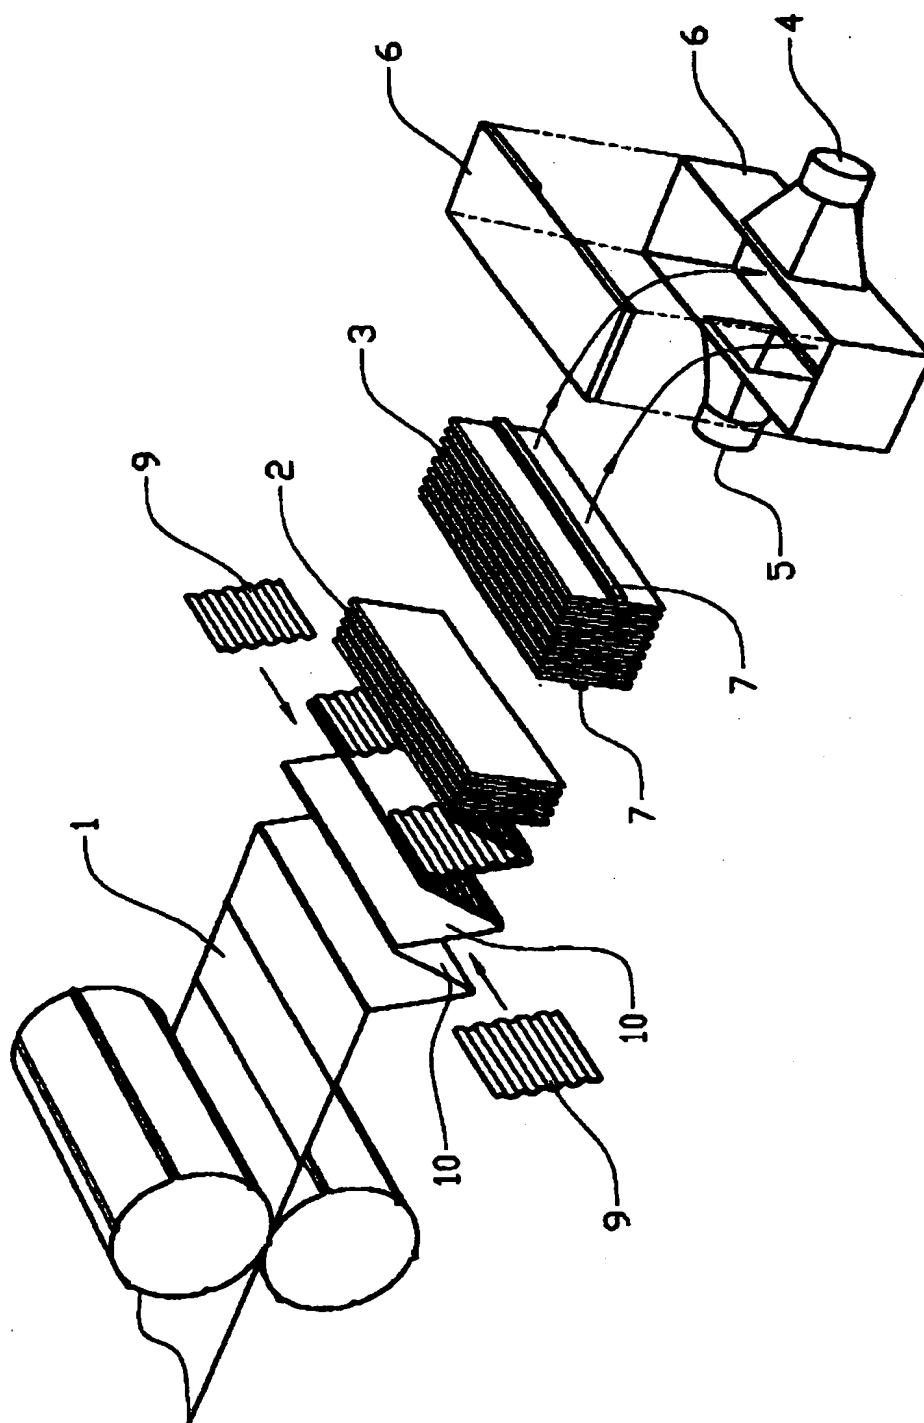


Fig. 1

2/8

Fig.2

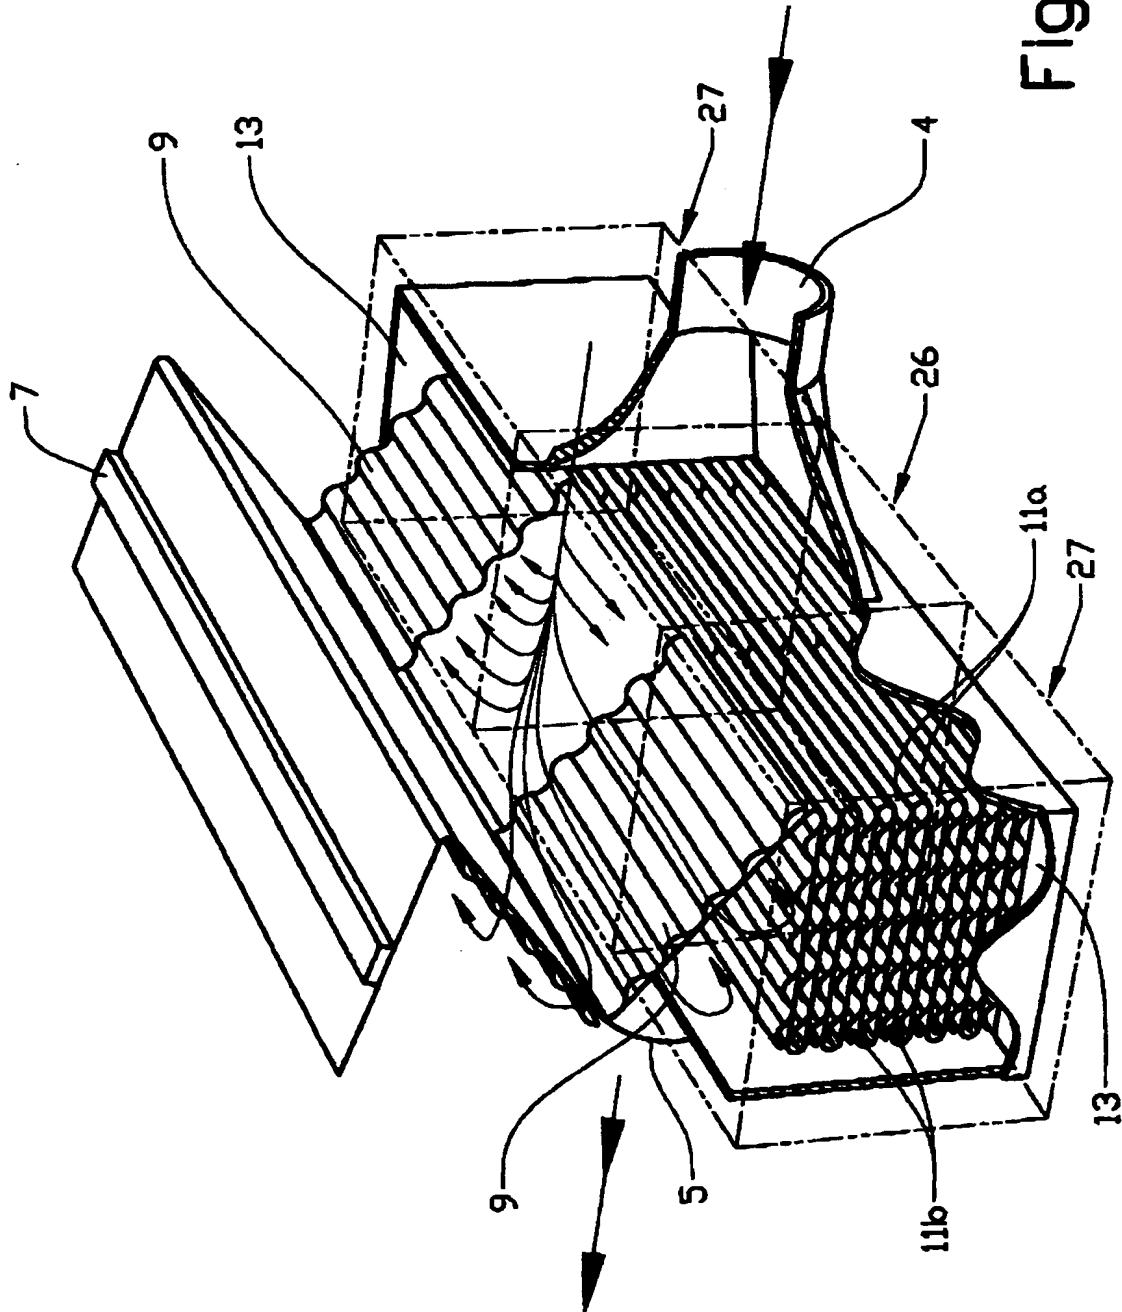

Patentförordningen

1997:15

Patentstyrelsen

3/8

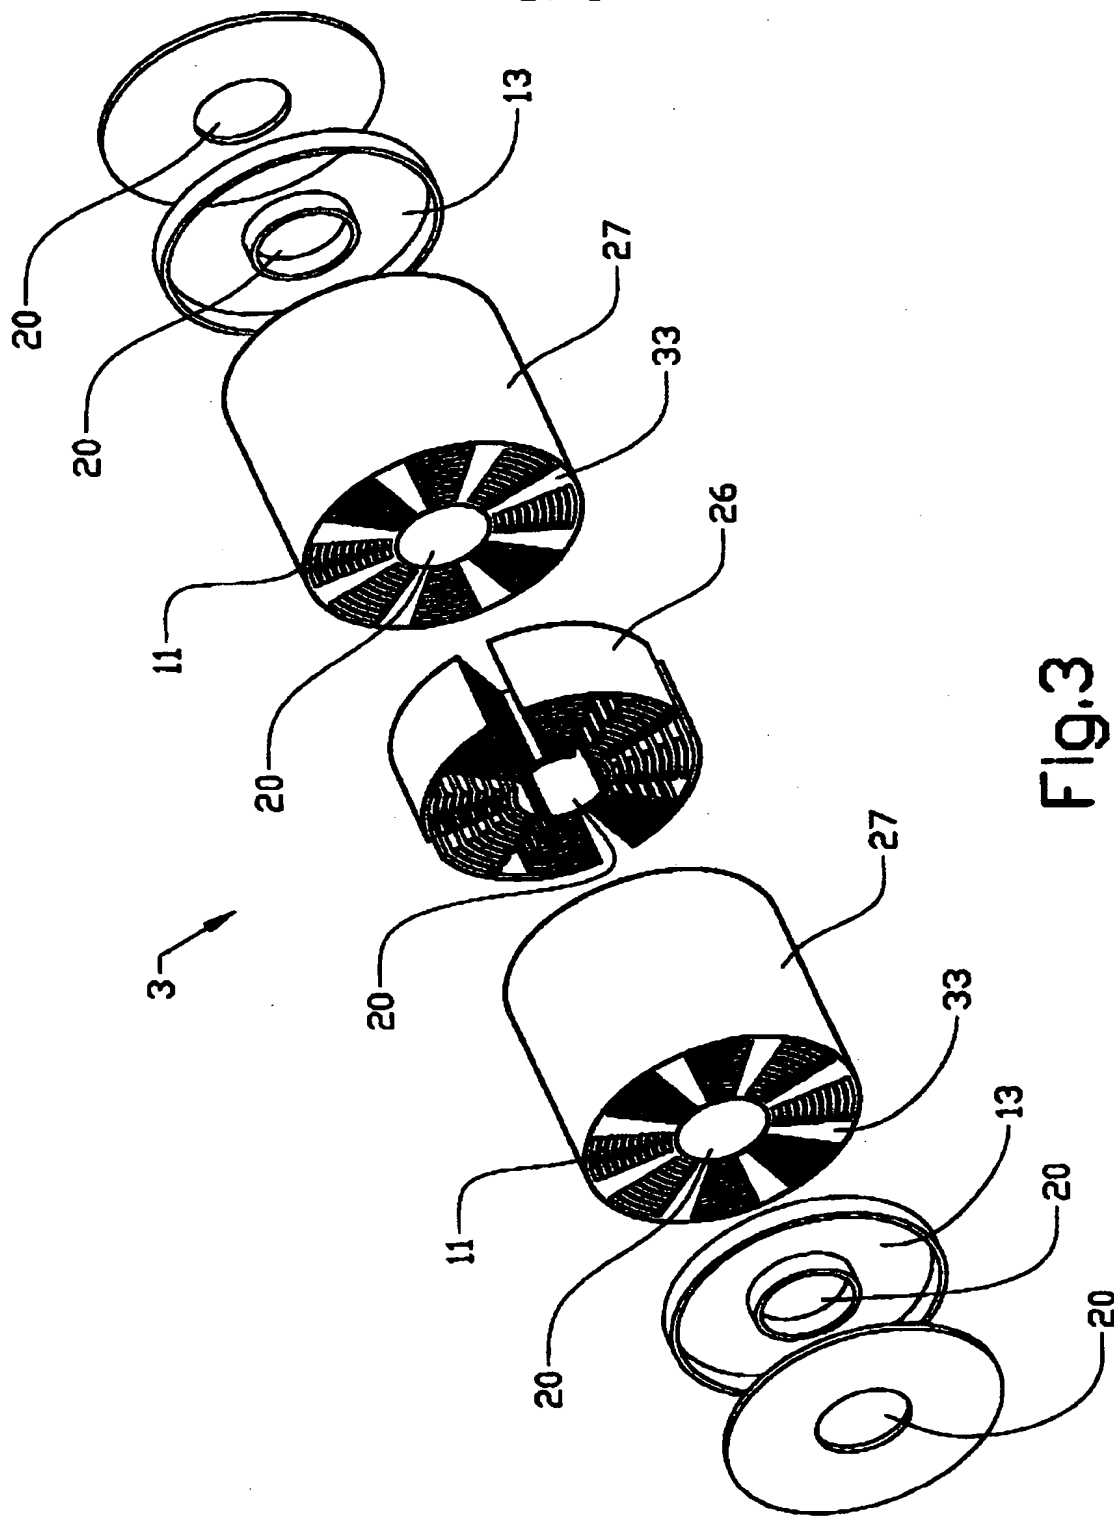


Fig. 3

FR 2 826 040 A1  
2002-02-15  
Fédération Française de la Recherche et de l'Innovation

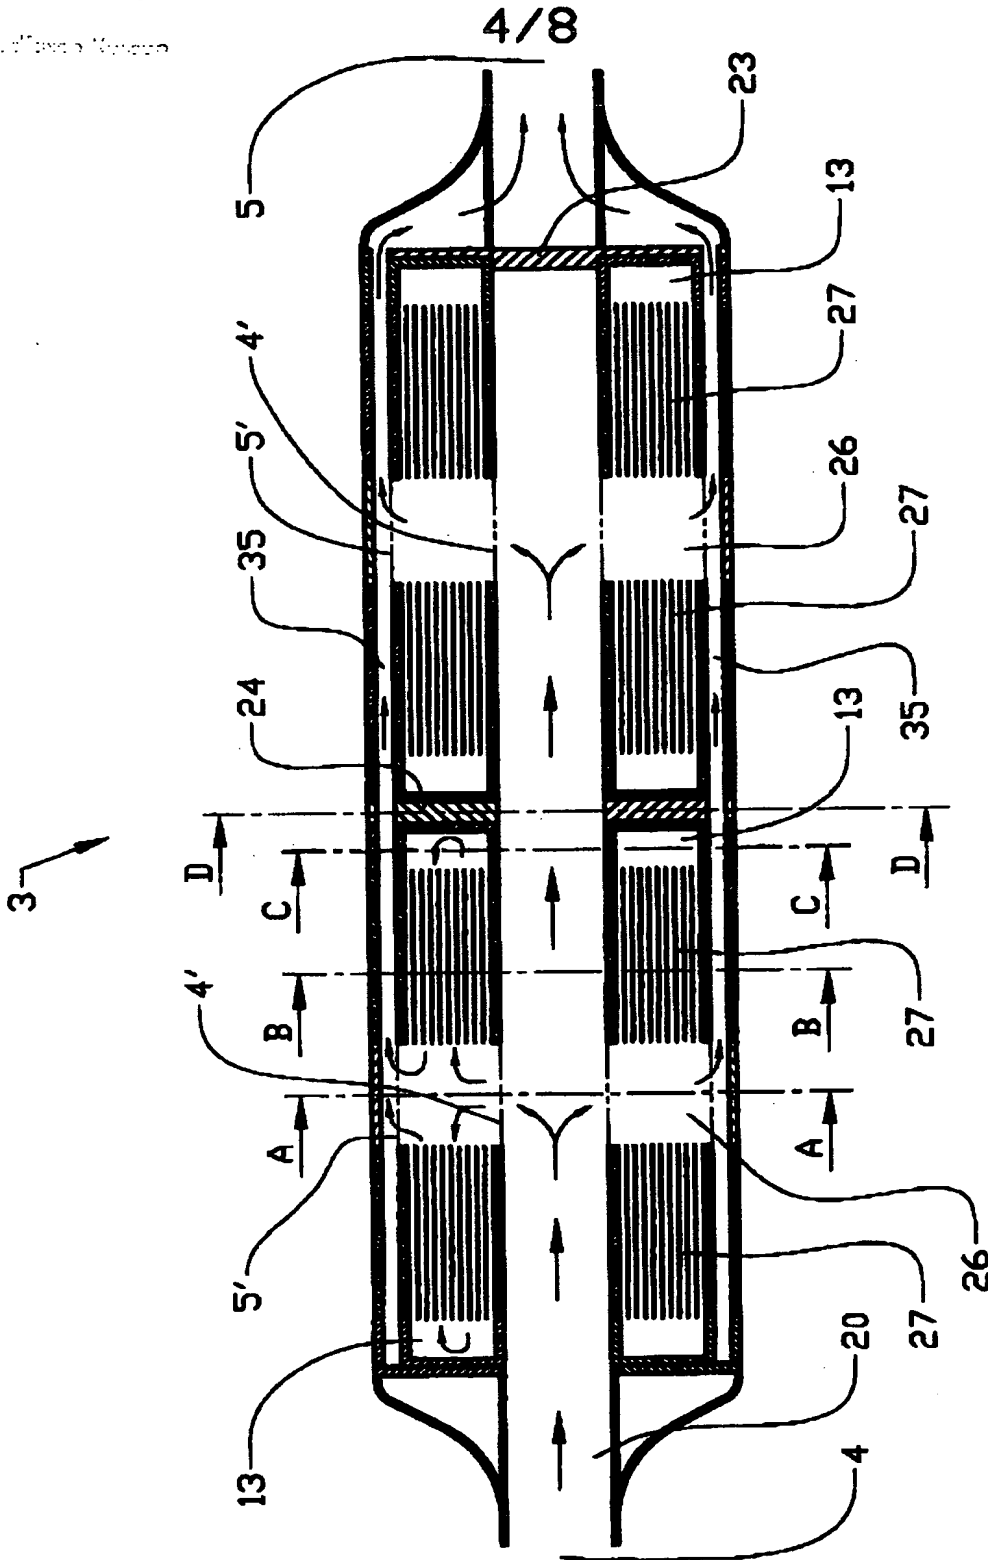



Fig.4

Int. Cl. B60K 1/00

Fig. 5


Fig. 6

5/8

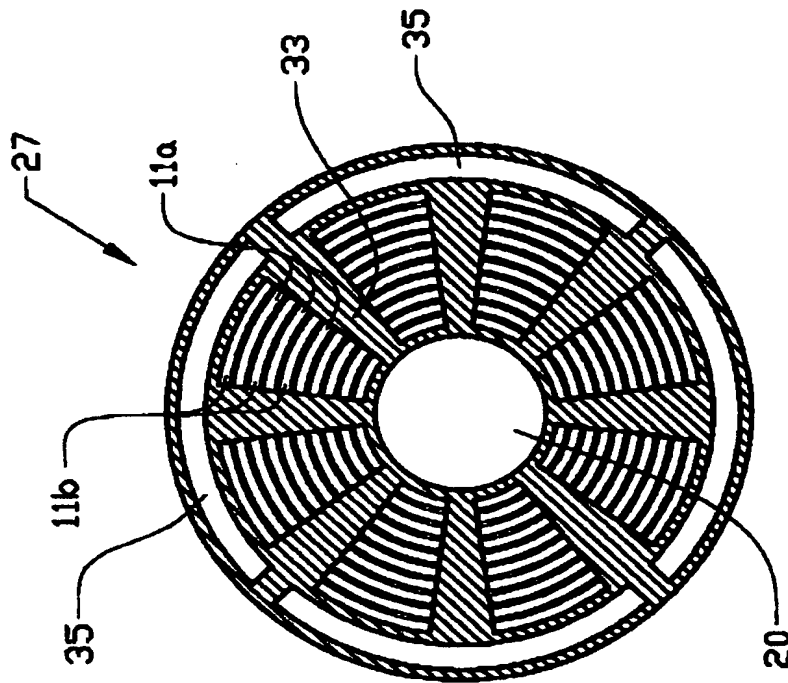

B-B

Fig. 6

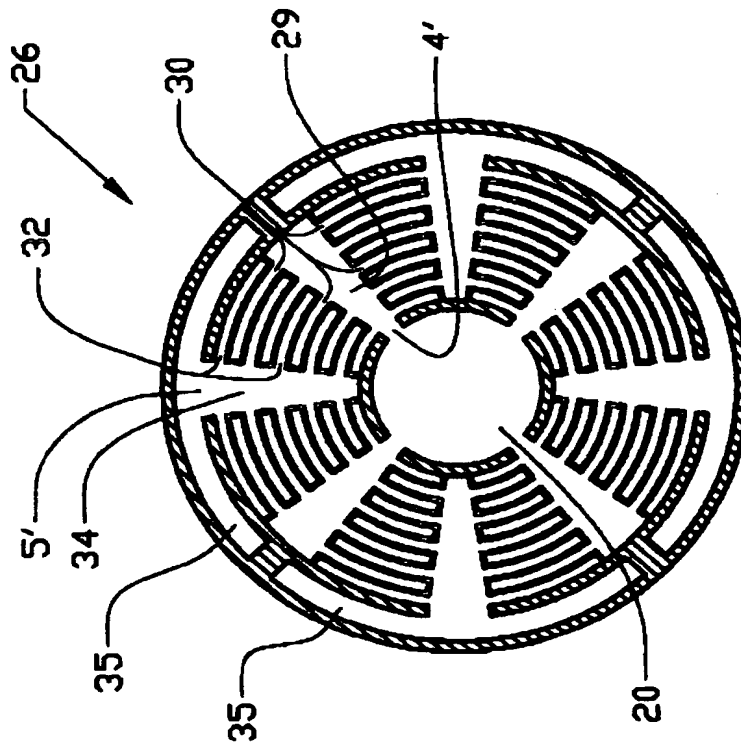

A-A

Fig. 5


0200432-1

Int. Cl. F16J 1/00

1999-01-01


Markusson Patent

6/8

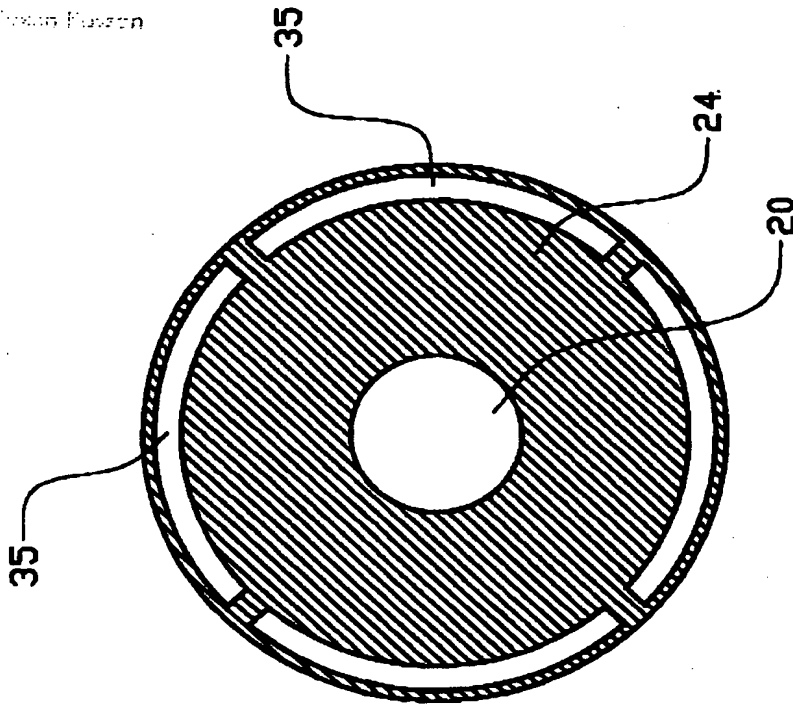

D-D

Fig. 8

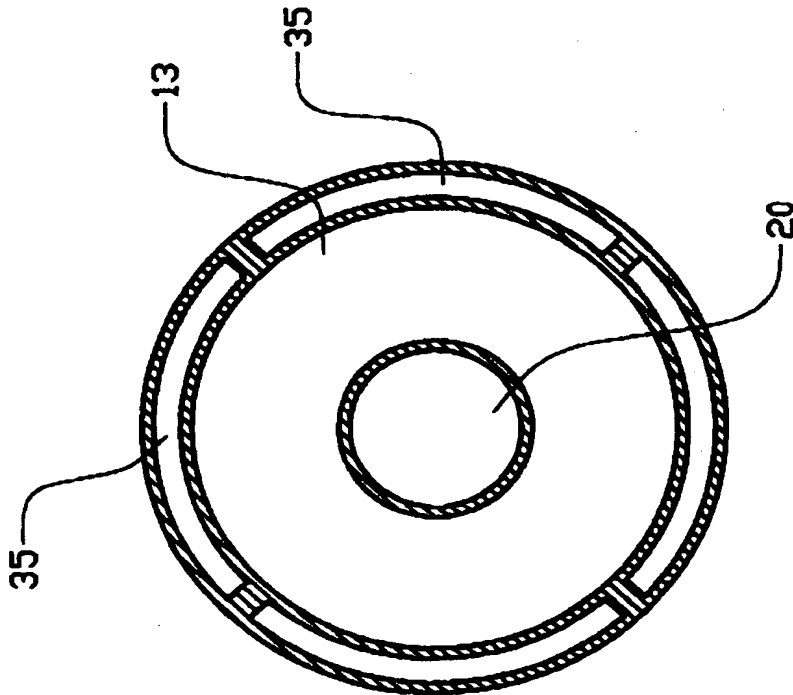

C-C

Fig. 7



8/8

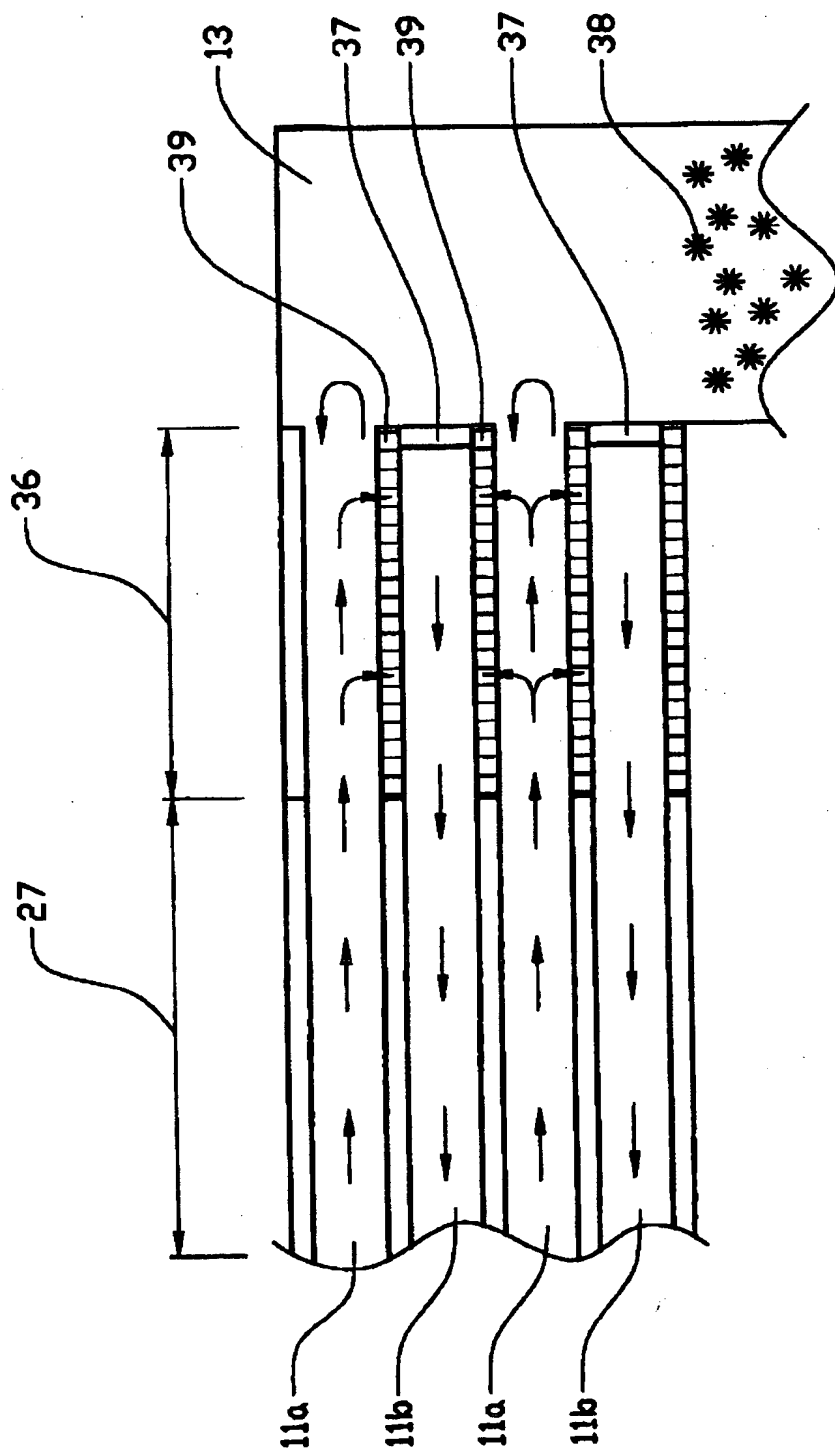


Fig.11